


TABLE FOR WRAP PROCEDURES




TROLLEY WITH MUD COLLECTION TANK

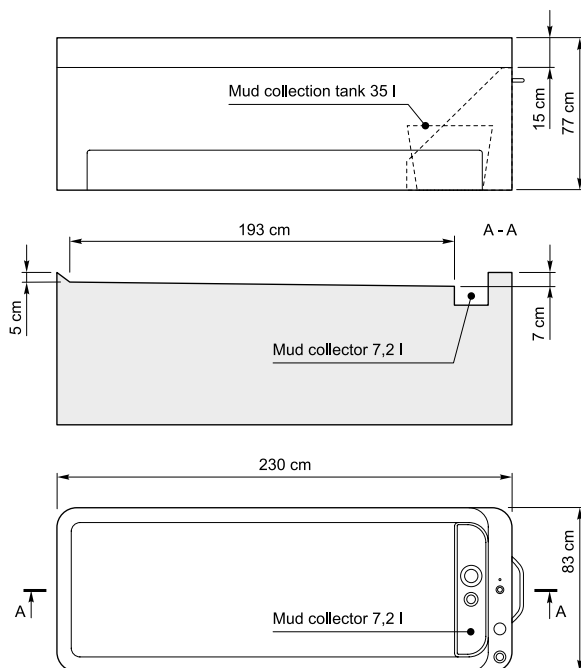


MEASURES FOR COMMUNICATIONS

- Drain for mud Ø 50 mm
- Drain for water Ø 50 mm
- ⊠ Hot water (1/2" stopcock max. 16 cm high from the floor)
- ⊡ Cold water (1/2" stopcock max. 16 cm high from the floor)
- ⊞ Supply wire cable (1 m long)
- ⊟ Additional earthing wire cable (1 m long)

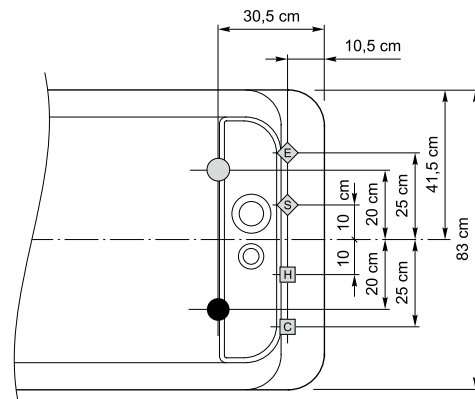

W-M-H


- Drain for water
- Drain for mud
- Table heating
- Table

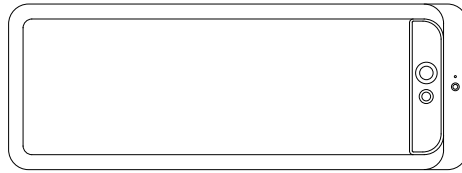

Power (kW) 0,15
 Current (A) 0,7
 Voltage (V) ~230
 Frequency (Hz) 50

W-M


- Drain for water
- Drain for mud
- Table

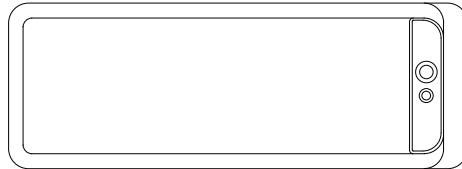

Power (kW) -
 Current (A) -
 Voltage (V) -
 Frequency (Hz) -

W-H


- Drain for water
- Table heating
- Table

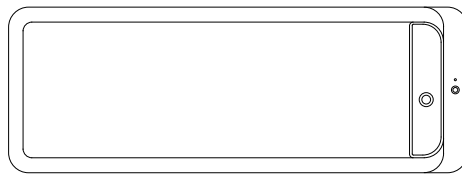

Power (kW) 0,15
 Current (A) 0,7
 Voltage (V) ~230
 Frequency (Hz) 50

W


- Drain for water
- Table

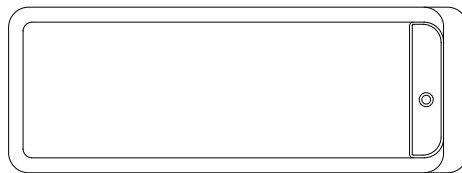

Power (kW) -
 Current (A) -
 Voltage (V) -
 Frequency (Hz) -

TABLE-H


- Table heating
- Table

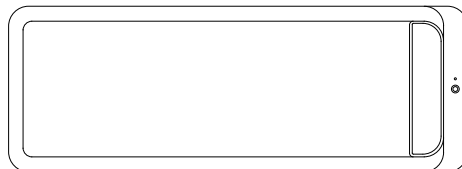

Power (kW) 0,15
 Current (A) 0,7
 Voltage (V) ~230
 Frequency (Hz) 50

TABLE

- Acrylic table
- Frame with adjustable feet
- 2 front and 2 side panels

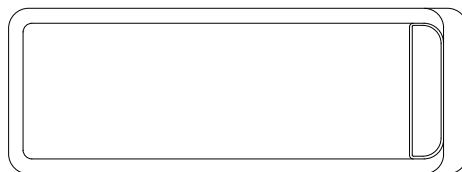


Power (kW) -
 Current (A) -
 Voltage (V) -
 Frequency (Hz) -

TECHNICAL DATA

1. MEASURES FOR CONNECTIONS OF HOT AND COLD WATER – 1/2".
2. MEASURE FOR WATER DRAIN CONNECTION – Ø 50 mm.
3. MEASURE FOR MUD DRAIN CONNECTION – Ø 50 mm.

ACCESSORIES



Cushion



Mattress



Mixer with handshower handle



Stairs



Trolley with mud collection tank